




1000 Series

Diesel Engine - ElectropaK

1004TG1

64.0 kWm 1500 rev/min

69.5 kWm 1800 rev/min

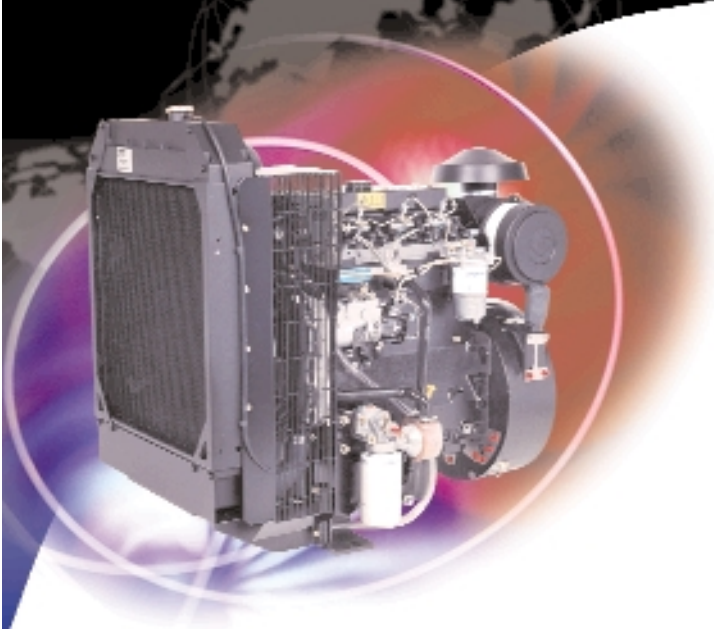

The Perkins 1000 Series family of ElectropaK engines are renowned throughout the power generation industry for their superior performance and reliability.

The 1004TG1 is a turbocharged 4 cylinder, 4 litre engine. Its premium features provide economic and durable operation offering the ideal characteristics for electrical power generation.

Economic power

One side servicing for reduced service time and cost.

Unique Quadram combustion system enables high power output with lower fuel consumption and noise.

Rated speed is changeable between 1500rpm and 1800rpm allowing standard builds to operate at either 50Hz or 60Hz.

Clean, efficient power

Operator and environmentally friendly with low noise and rapid startability and low emissions.

Durable power

Leak free operation is ensured by Viton crankshaft seals and sophisticated controlled swell joints, giving protection in the toughest conditions.

Inserted valve seats, oil spray cooled pistons and compact plate cooler give enhanced engine life.

Reliable power

Wherever a Perkins' ElectropaK engine is put into service, it will never be far from the support provided by a global network of 4000 distributors and dealers, all backed by a parts distribution centre giving 24 hour service, 365 days a year.

Suitable for operation in ambient temperatures up to 53°C (46°C if a canopy is fitted)

Fuelled starting aid for temperatures down to -20°C.

Engine Speed rev/min	Type of Operation	Typical Generator Output (Net)		Engine Power			
				Gross		Net	
		kVA	kWe	kWm	bhp	kWm	bhp
1500	Prime power	65.0	52.0	60.0	80.5	58.0	78.0
	Standby power	71.5	57.5	66.0	88.5	64.0	86.0
1800	Prime power	70.5	56.5	66.5	89.0	63.0	84.5
	Standby power	77.5	62.0	73.0	98.0	69.5	93.0

All ratings data based on operation under ISO 3046 conditions using typical fan sizes and drive ratios. For operation outside of these conditions please consult your Perkins Engines contact. Performance tolerance quoted by Perkins is ±5%.

Electrical ratings assume a power factor of 0.8 and a generator efficiency of 90%.

Fuel specification: BS2869 Part 2 1998 Class A2 or ASTM D975 D2.

Lubricating oil: A single or multigrade oil to ACEA E1 E2 or CD/SD.

Rating Definitions

Prime power: Power available at variable load in lieu of main power network. An overload of 10% is permitted for one hour in every twelve hours of operation.

Standby power: Power available at variable load in the event of a main power network failure. No overload is permitted.

1000 Series 1004TG1

Standard ElectropaK Specification

Air Inlet

Mounted air filter

Fuel System

Rotary fuel injection pump
Mechanical governing conforms to ISO8528-5 1993 (E)
Class G2, ISO3046-4M3
Spin-on full flow fuel filter with pre filter

Lubrication System

Rear well aluminium sump with filler and dipstick
Spin-on full-flow oil filter

Cooling System

Gear-driven circulating pump
20" belt-driven fan and guards
Mounted radiator and pipework

Electrical Equipment

12 Volt starter motor and 12 Volt 55 Amp alternator with DC output
12 Volt senders for oil pressure and coolant temperature
12 Volt shutdown solenoid energised to run
Cold start aid

Flywheel and Housing

High inertia flywheel to SAE J620 Size 10/11 1/2
Cast iron SAE 3 flywheel housing

Mountings

Front engine mounting bracket

Optional Equipment


24V alternator
24V starter motor
Water temperature gauge and sender
Heater/starter switch
Rear engine mountings
Workshop manual
Parts book
User handbook
Electronic governor (12V only)



Perkins Engines Company Limited

Peterborough PE1 5NA
United Kingdom
Telephone +44 (0)1733 583000
Fax +44 (0)1733 582240
www.perkins.com


All information in this leaflet is substantially correct at the time of printing but may be changed subsequently by the Company

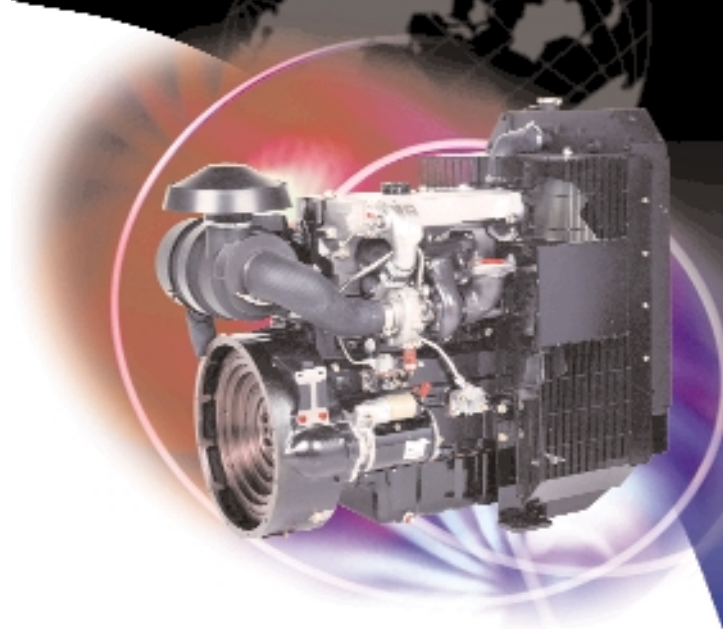

ElectropaK General Data

Number of cylinders	4
Cylinder arrangement	Vertical, in-line
Cycle	4-stroke
Induction system	Turbocharged
Combustion system	Direct injection
Cooling system	Water-cooled
Displacement	3.99 litres
Bore and stroke	100 mm x 127 mm
Compression ratio	16:1
Direction of rotation	Clockwise, viewed from the front
Firing order	1, 3, 4, 2
Total lubrication system capacity	8.1 litre
Coolant capacity (inc radiator)	18.7 litres
Length	1166 mm
Width	665 mm
Height	981 mm
Total weight (dry)	433 kg
Total weight (wet)	458 kg

Fuel consumption litres/hour (UK gallons/hour)		
Power rating	1500 rev/min	1800 rev/min
Standby power	16.4 (3.6)	18.8 (4.1)
Prime power	14.5 (3.2)	17.1 (3.7)
75% of prime power	10.9 (2.4)	13.2 (2.9)
50% of prime power	7.7 (1.7)	9.6 (2.1)

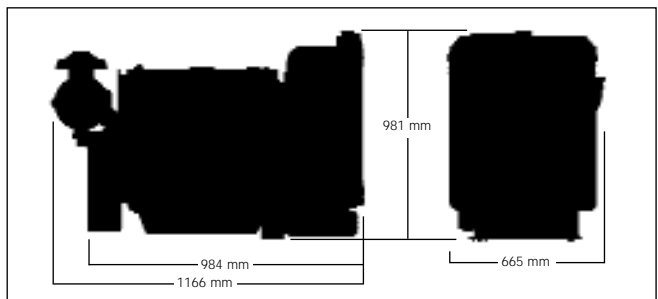

Distributed by