

PANDAROS DC 6

DATA SHEET

Description

The DC 6 is HEINZMANN's second generation of digital PANDAROS controls for small- sized high-speed engines.

This highly efficient speed governor is based on a 16-bit microprocessor. The DC 6 control unit offers two separate speed pickup inputs, inductive or Hall type.

Integrated CAN provides external communication. DC 6 is able to drive direct working as well as gear-type actuators which however require the extension module CU01. Setting torques up to 30 Nm are possible. In combination with HEINZMANN's small, medium and large range actuators or the Bosch EDC™ pump DC 6

control unit provides the ideal solution for small high-speed engines and turbine applications. The advanced DC 6 hardware is fully compatible with any predecessor. All DC 6 software versions can be used without any change.



Actuators

PANDAROS DC 6 is the control device for the PANDAROS family.

PANDAROS Systems	StG 6/10	StG 16/30/40	StG 2005/2010/2040/2080	StG 2005/2040-DP
PANDAROS I	x			
PANDAROS II			x	
PANDAROS III		x		
PANDAROS IV		x		
PANDAROS V				x
PANDAROS VI digital positioner	x	x	x	

Features

Extended generator and vehicle application

Two separate speed pickups possible

Additional analogue inputs for synchronising and isochronous load sharing

Overspeed protection

Start fuel limitation regarding engine temperature for optimum fuel quantity during start and run-up phase and reduction of start-up smoke to a minimum

PID mapping of governors dynamic characteristic according to speed, temperature and load

Idling and maximum speed control, velocity limitation and regulation for vehicle applications

Fuel limitation depending on speed, boost pressure, temperature and further parameters for optimal load factor and in order to protect the engine

Speed dependent monitoring of oil pressure with or without engine stop for engine protection

Communication via CAN

Easy parameterisation via HEINZMANN DcDesk 2000 communication tool or hand programmer

Governor and sensor monitoring

Error and operating data logging

Applications

- Stationary applications, e.g. generator sets or power stations
- Dual fuel applications
- Gas, water and steam turbines
- Heat pumps

Technical data

General specification	
Supply voltage	24 VDC, 12 VDC
Operating voltage range	9 ... 33 VDC
Supply current	300 mA (plus actuator current)
Operating temperature range	-40 ... 80 °C
Protection level	IP00 or IP55
Connections	IP00, spring cage terminal optional; IP55, plugs due to application
Vibration	7 g / 10 ... 400 Hz
Humidity	95 % rel. humidity at 55 °C
Insulation	> 1 MΩ at 48 VDC
Weight	IP00: 1.2 kg IP55: 3 kg
Compliances	2004/108/EG; GL (positioner only)


I/O specification			
Inputs	Pickup	1	Hall type, 10 ... 9000 Hz
	Pickup	1	Inductive sensors, 0.5 ... 30 Vpp / 50 ... 9000 Hz
	Analogue	3	0 ... 5 V or 4 ... 20 mA
	Temperature	1	PT200, PT1000, NTC, NI1000
	Digital 1 / PWM	3	24 VDC, (< 1 V / > 5 V)
	Digital 2	1	24 VDC, (< 1 V / > 5 V)
Outputs	Analogue	2	4 ... 20 mA
	Digital / PWM	2	0.3 A, low side, 10 ... 90 %, short circuit protected
	Sensor supply	1	5.0 VDC, 50 mA max.
	Alarm output 1	1	0.3 A, low side, short circuit protected
Communication interface	on-board	1	HEINZMANN Service Interface
	on-board	1	CAN 2.0B

Certificates


Certificates on request

Dimensions


IP00 with coil unit CU-01

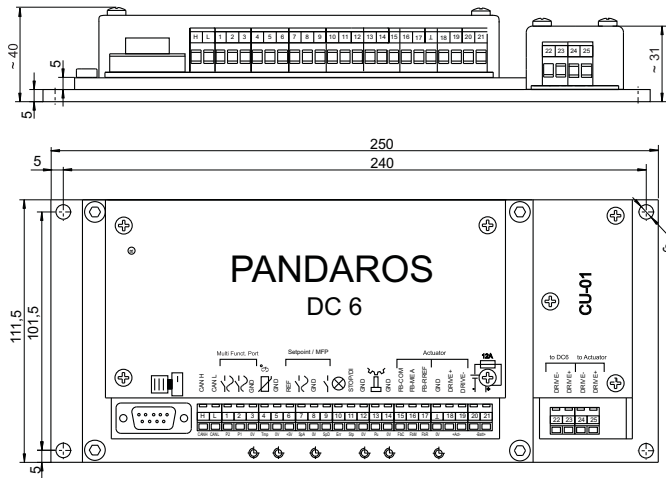

IP00 without coil unit CU-01

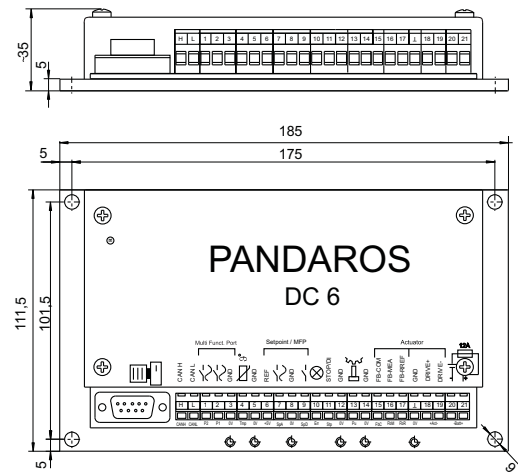

IP55, any version

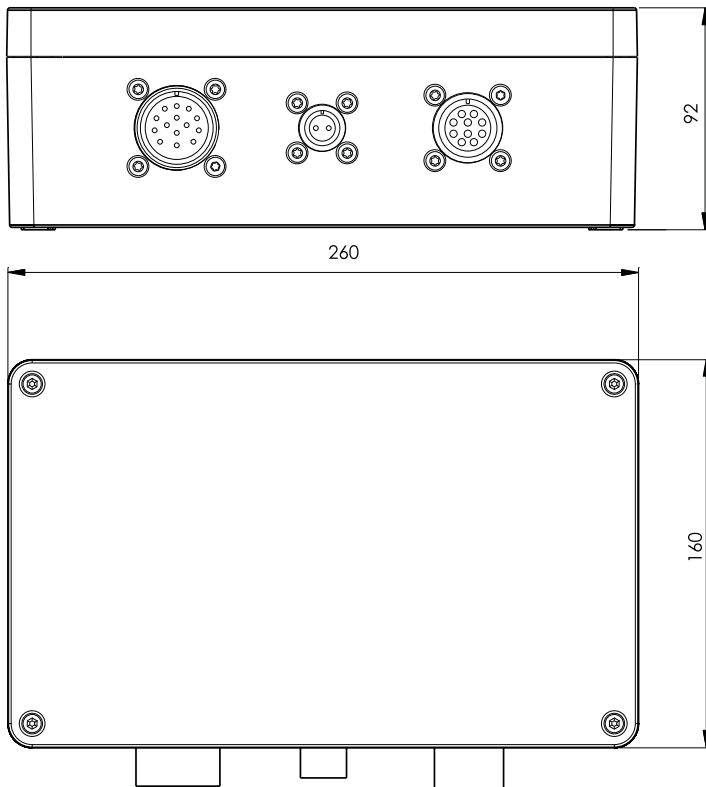

Subject to alterations. ©Heinzmann GmbH & Co. KG, 2010



Heinzmann GmbH & Co. KG
Am Haselbach 1
D-79677 Schönau/Germany

Phone: +49 7673 8208 - 0
Fax: +49 7673 8208 - 188
Email: info@heinzmann.de