



**Cummins Inc.**  
Columbus, Indiana 47201  
**ENGINE PERFORMANCE CURVE**

Basic Engine Model:  
**6BT5.9-G4**

Curve Number:  
**FR-90355 @ 1500 RPM**  
**FR-90354 @ 1800 RPM**

**G-DRIVE**  
**B5.9**  
**1**

Engine Critical Parts List:

**CPL: 2372**

Date:  
**19Dec02**

Displacement : **5.88 litre (359.0 in<sup>3</sup>)**

Bore : **102 mm (4.02 in.)** Stroke : **120 mm (4.72 in.)**

No. of Cylinders : **6**


Aspiration : **Turbocharged**

Engine Speed RPM	Standby Power		Prime Power		Continuous Power	
	kWm	BHP	kWm	BHP	kWm	BHP
1500	89	120	81	109	56	75
1800	104	140	95	127	75	100

**Emissions Certification:** This engine complies with certain emissions requirements established by US EPA/CARB in accordance with the OEM TPEM provision of 40CFR89.102 for Tier 1 emission limits. See Exhaust Emissions Data Sheet for conformance specifications.


### Engine Performance Data @ 1500 RPM

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	BHP	kg/ kWm·h	lb/ BHP·h	litre/ hour	U.S. Gal/ hour
<b>STANDBY POWER</b>						
100	89	120	0.219	0.358	23	6.0
<b>PRIME POWER</b>						
100	81	109	0.212	0.347	20	5.3
75	61	82	0.213	0.349	15	4.0
50	41	55	0.212	0.348	10	2.7
25	20	27	0.250	0.407	5.9	1.6
<b>CONTINUOUS POWER</b>						
100	56	75	0.211	0.348	14	3.7

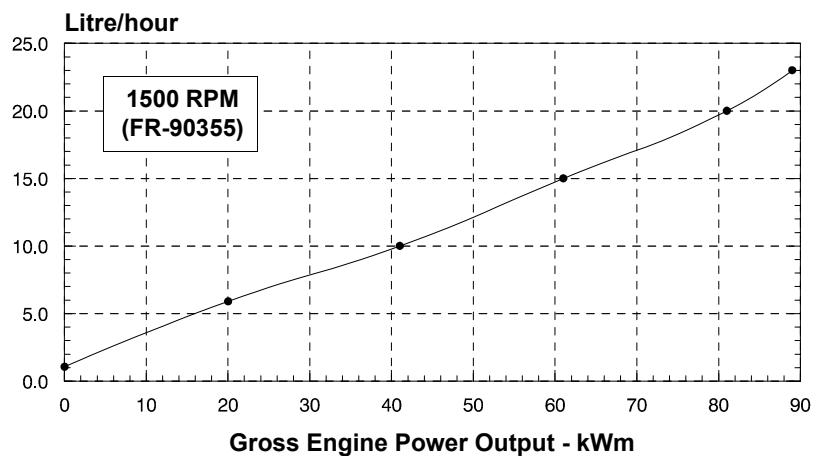

### Engine Performance Data @ 1800 RPM

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	BHP	kg/ kWm·h	lb/ BHP·h	litre/ hour	U.S. Gal/ hour
<b>STANDBY POWER</b>						
100	104	140	0.221	0.361	27	7.1
<b>PRIME POWER</b>						
100	95	127	0.214	0.352	24	6.3
75	71	95	0.210	0.344	18	4.6
50	48	64	0.215	0.354	12	3.2
25	24	32	0.258	0.426	7.3	1.9
<b>CONTINUOUS POWER</b>						
100	75	100	0.214	0.354	19	5.0

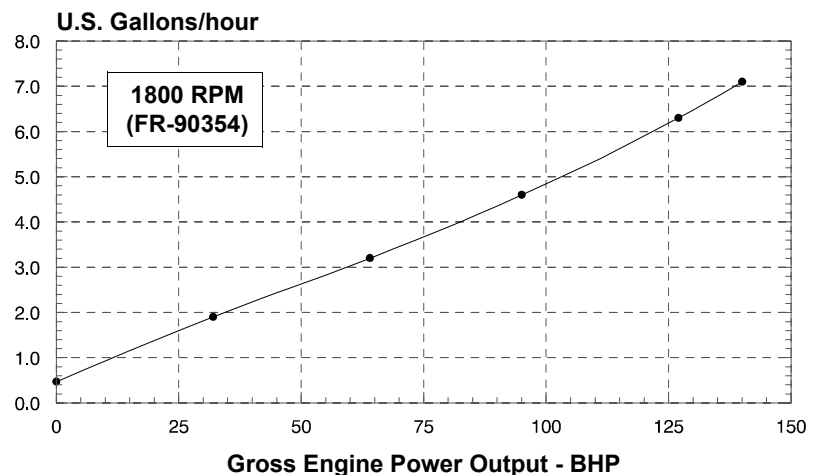

**CONVERSIONS:** (Litres = U.S. Gal x 3.785) (Engine kWm = BHP x 0.746) (U.S. Gal = Litres x 0.2642) (Engine BHP = Engine kWm x 1.34)

Data shown above represent gross engine performance capabilities obtained and corrected in accordance with ISO-3046 conditions of 100 kPa (29.53 in Hg) barometric pressure [110 m (361 ft) altitude], 25 °C (77 °F) air inlet temperature, and relative humidity of 30% with No. 2 diesel or a fuel corresponding to ASTM D2. See reverse side for application rating guidelines.

The fuel consumption data is based on No. 2 diesel fuel weight at 0.85 kg/litre (7.1 lbs/U.S. gal).

Power output curves are based on the engine operating with fuel system, water pump and lubricating oil pump; not included are battery charging alternator, fan, optional equipment and driven components.

## POWER RATING APPLICATION GUIDELINES FOR GENERATOR DRIVE ENGINES

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. Generator drive engines are not designed for and shall not be used in variable speed D.C. generator set applications.

**STANDBY POWER RATING** is applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating.

This rating should be applied where reliable utility power is available. A standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency.

**CONTINUOUS POWER RATING** is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

**PRIME POWER RATING** is applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories:

### UNLIMITED TIME RUNNING PRIME POWER

Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours.

The total operating time at 100% Prime Power shall not exceed 500 hours per year.

A 10% overload capability is available for a period of 1 hour within a 12 hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year.

### LIMITED TIME RUNNING PRIME POWER

Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating.

### Reference Standards:

BS-5514 and DIN-6271 standards are based on ISO-3046.

### Operation At Elevated Temperature And Altitude:

The engine may be operated at:

1800 RPM up to 5,000 ft. (1525 m) and 104 °F (40 °C) without power deration.

1500 RPM up to 5,000 ft. (1525 m) and 104 °F (40 °C) without power deration.

For sustained operation above these conditions, derate by 4% per 1,000 ft (300 m), and 1% per 10 °F (2% per 11 °C).

# Cummins Inc.

## Engine Data Sheet

G-DRIVE

**B5.9**

**3**

**ENGINE MODEL : 6BT5.9-G4**

**CONFIGURATION NUMBER : D402012GX02**

**DATA SHEET : DS-90354**

**DATE : 19Dec02**

**PERFORMANCE CURVE : FR-90355 @ 1500  
FR-90354 @ 1800**

**INSTALLATION DIAGRAM**

• Fan to Flywheel : 3170296

**CPL NUMBER**

• Engine Critical Parts List : 2372

**GENERAL ENGINE DATA**

Type.....	4-Cycle; In-line; 6-Cylinder Diesel
Aspiration.....	Turbocharged
Bore x Stroke..... — in x in (mm x mm)	4.02 x 4.72 (102 x 120)
Displacement..... — in <sup>3</sup> (litre)	359 (5.88)
Compression Ratio.....	17.3 : 1
<b>Dry Weight</b>	
Fan to Flywheel Engine..... — lb (kg)	865 (393)
Heat Exchanger Cooled Engine..... — lb (kg)	N/A
<b>Wet Weight</b>	
Fan to Flywheel Engine..... — lb (kg)	938 (426)
Heat Exchanger Cooled Engine..... — lb (kg)	N/A
<b>Moment of Inertia of Rotating Components</b>	
• with FW 9016 Flywheel..... — lb <sub>m</sub> • ft <sup>2</sup> (kg • m <sup>2</sup> )	34.8 (1.47)
• with FW 9017 Flywheel..... — lb <sub>m</sub> • ft <sup>2</sup> (kg • m <sup>2</sup> )	25.3 (1.06)
Center of Gravity from Rear Face of Flywheel Housing..... — in (mm)	21.4 (544)
Center of Gravity Above Crankshaft Centerline..... — in (mm)	6.1 (155)
Maximum Static Loading at Rear Main Bearing..... — lb (kg)	N.A.

**ENGINE MOUNTING**

Maximum Bending Moment at Rear Face of Block..... — lb • ft (N • m)	1000 (1356)
---	-------------

**EXHAUST SYSTEM**

Maximum Back Pressure..... — in Hg (mm Hg)	3 (76)
--	--------

**AIR INDUCTION SYSTEM**

<b>Maximum Intake Air Restriction</b>		
• with Dirty Filter Element..... — in H <sub>2</sub> O (mm H <sub>2</sub> O)	25	(635)
• with Normal Duty Air Cleaner and Clean Filter Element..... — in H <sub>2</sub> O (mm H <sub>2</sub> O)	10	(254)
• with Heavy Duty Air Cleaner and Clean Filter Element..... — in H <sub>2</sub> O (mm H <sub>2</sub> O)	15	(381)

**COOLING SYSTEM**

Coolant Capacity — Engine Only..... — US gal (litre)	2.4	(9.1)
— with HX 9911 Heat Exchanger..... — US gal (litre)		N/A
<b>Maximum Coolant Friction Head External to Engine</b>		
— 1800 rpm..... — psi (kPa)	5	(35)
— 1500 rpm..... — psi (kPa)	4	(28)
Maximum Static Head of Coolant Above Engine Crank Centerline..... — ft (m)	46	(14)
Standard Thermostat (Modulating) Range..... — °F (°C)	180 - 203	(82 - 95)
Minimum Pressure Cap..... — psi (kPa)	10	(69)
Maximum Top Tank Temperature for Standby / Prime Power..... — °F (°C)	220 / 212	(104 / 100)
Minimum Raw Water Flow @ 90°F to HX 9911 Heat Exchanger..... — US gpm (litre / min)		N/A
Maximum Raw Water Inlet Pressure at HX 9911 Heat Exchanger..... — psi (kPa)		N/A

**LUBRICATION SYSTEM**

Oil Pressure @ Idle Speed..... — psi (kPa)	30	(207)
@ Governed Speed..... — psi (kPa)	50	(345)
Maximum Oil Temperature..... — °F (°C)	250	(121)
Oil Capacity with OP 9006 Oil Pan : High - Low..... — US gal (litre)	3.8 - 3.3	(14.2 - 12.3)
Total System Capacity (Including Full Flow Filter)..... — US gal (litre)	4.3	(16.4)
Angularity of OP 9006 Oil Pan — Front Down.....		40°
— Front Up.....		40°
— Side to Side.....		40°

**FUEL SYSTEM**

Type Injection System.....	Bosch "a" Direct Injection
Maximum Restriction at Lift Pump..... — in Hg (mm Hg)	4 (102)
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head)..... — in Hg (mm Hg)	20 (508)
Total Drain Flow (constant for all loads)..... — US gph (litre / hr)	8 (30)

**ELECTRICAL SYSTEM**

Cranking Motor (Heavy Duty, Positive Engagement)..... — volt	12	24
Battery Charging System, Negative Ground..... — ampere	63	40
Maximum Allowable Resistance of Cranking Circuit..... — ohm	0.00075	0.002
Minimum Recommended Battery Capacity		
• Cold Soak @ 10 °F (-12 °C) and Above..... — 0°F CCA	800	400

**COLD START CAPABILITY**

Minimum Ambient Temperature for Aided (with Coolant Heater) Cold Start within 10 seconds..... — °F (°C)	50	(10)
Minimum Ambient Temperature for Unaided Cold Start..... — °F (°C)	10	(-12)

**PERFORMANCE DATA**

- All data is based on:
- Engine operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer; not included are battery charging alternator, fan, and optional driven components.
  - Engine operating with fuel corresponding to grade No. 2-D per ASTM D975.
  - ISO 3046, Part 1, Standard Reference Conditions of:
 

Barometric Pressure	: 100 kPa (29.53 in Hg)	Air Temperature	: 25 °C (77 °F)
Altitude	: 110 m (361 ft)	Relative Humidity	: 30%

Steady State Stability Band at any Constant Load..... — %	+/- 0.50
Estimated Free Field Sound Pressure Level of a Typical Generator Set;	
Excludes Exhaust Noise; at Rated Load and 7.5 m (24.6 ft); 1800 rpm / 1500 rpm..... — dBA	N.A.
Exhaust Noise at 1 m Horizontally from Centerline of Exhaust Pipe Outlet Upwards at 45°..... — dBA	N.A.

Governed Engine Speed..... — rpm	
Engine Idle Speed..... — rpm	
Gross Engine Power Output..... — BHP (kW <sub>m</sub> )	
Brake Mean Effective Pressure..... — psi (kPa)	
Piston Speed..... — ft / min (m / s)	
Friction Horsepower..... — HP (kW <sub>m</sub> )	
Engine Water Flow at Stated Friction Head External to Engine:	
• 1 psi Friction Head..... — US gpm (litre / s)	
• Maximum Friction Head..... — US gpm (litre / s)	

	<b>STANDBY POWER</b>		<b>PRIME POWER</b>	
	<b>60 hz</b>	<b>50 hz</b>	<b>60 hz</b>	<b>50 hz</b>
	1800	1500	1800	1500
Engine Speed..... — rpm	950 - 1150	950 - 1150	950 - 1150	950 - 1150
Gross Engine Power Output..... — BHP (kW <sub>m</sub> )	140 (104)	120 (89)	127 (95)	109 (81)
Brake Mean Effective Pressure..... — psi (kPa)	172 (1185)	177 (1220)	156 (1076)	160 (1103)
Piston Speed..... — ft / min (m / s)	1416 (7.2)	1180 (6.0)	1416 (7.2)	1180 (6.0)
Friction Horsepower..... — HP (kW <sub>m</sub> )	22 (16.4)	17 (12.7)	22 (16.4)	17 (12.7)
Engine Water Flow at Stated Friction Head External to Engine:				
• 1 psi Friction Head..... — US gpm (litre / s)	38 (2.4)	32 (2.0)	38 (2.4)	32 (2.0)
• Maximum Friction Head..... — US gpm (litre / s)	30 (1.9)	24 (1.5)	30 (1.9)	24 (1.5)
Intake Air Flow..... — cfm (litre / s)	293 (139)	220 (104)	276 (130)	207 (98)
Exhaust Gas Temperature..... — °F (°C)	979 (526)	1032 (555)	924 (495)	961 (516)
Exhaust Gas Flow..... — cfm (litre / s)	744 (352)	583 (275)	672 (318)	521 (245)
Air to Fuel Ratio..... — air : fuel	24.7 : 1	21.8 : 1	26.2 : 1	23.2 : 1
Radiated Heat to Ambient..... — BTU / min (kW <sub>m</sub> )	918 (16)	779 (14)	817 (14)	690 (12)
Heat Rejection to Coolant..... — BTU / min (kW <sub>m</sub> )	3304 (58)	3016 (53)	2977 (52)	2668 (47)
Heat Rejection to Exhaust..... — BTU / min (kW <sub>m</sub> )	5132 (90)	4087 (72)	4487 (79)	3561 (63)

**Engine Data with Dry Type Exhaust Manifold**

Intake Air Flow..... — cfm (litre / s)	293 (139)	220 (104)	276 (130)	207 (98)
Exhaust Gas Temperature..... — °F (°C)	979 (526)	1032 (555)	924 (495)	961 (516)
Exhaust Gas Flow..... — cfm (litre / s)	744 (352)	583 (275)	672 (318)	521 (245)
Air to Fuel Ratio..... — air : fuel	24.7 : 1	21.8 : 1	26.2 : 1	23.2 : 1
Radiated Heat to Ambient..... — BTU / min (kW <sub>m</sub> )	918 (16)	779 (14)	817 (14)	690 (12)
Heat Rejection to Coolant..... — BTU / min (kW <sub>m</sub> )	3304 (58)	3016 (53)	2977 (52)	2668 (47)
Heat Rejection to Exhaust..... — BTU / min (kW <sub>m</sub> )	5132 (90)	4087 (72)	4487 (79)	3561 (63)

**N.A.** - Data is Not Available  
**N/A** - Not Applicable to this Engine  
**TBD** - To Be Determined

**ENGINE MODEL : 6BT5.9-G4**

**DATA SHEET : DS-90354**

**DATE : 19Dec02**

**CURVE NO. : FR-90355 @ 1500 RPM  
 FR-90354 @ 1800 RPM**